

ChemStar Mechanical Packing, Inc.

Address: 3010 Reynolds Rd

Lakeland, FL 33803 USA

Office: (863) 425-5581 / (800) 397-5581


Fax: (863) 425-5762

Email: sales@chemstarpacking.com

Website: www.chemstarpacking.com



STYLE 3165

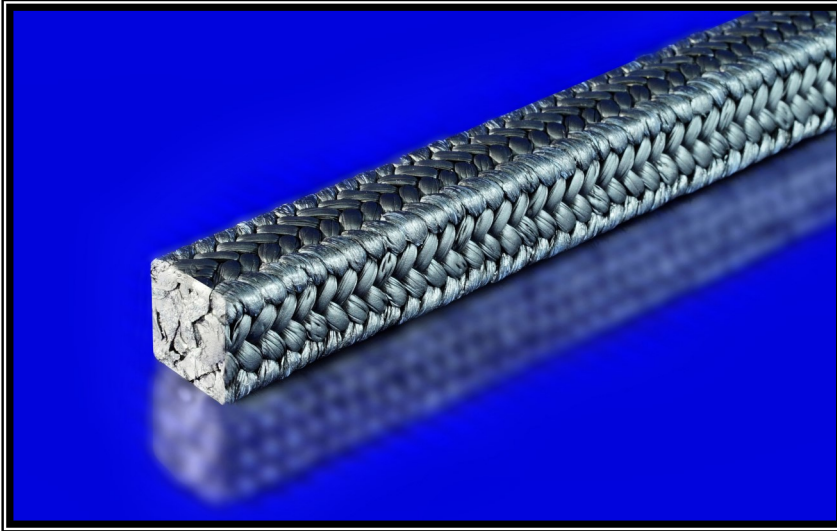

- **Temperature: To 550°F / 285°C**
- **pH Range: 0-14**
- **Speed: 4500 FPM**
- **Pressure: 300 PSI / 20 Bar**
- **Construction: Interlock Braid**

Description: *A special blend of graphite filled PTFE fiber with excellent thermal conductivity, chemical and abrasive resistance. 3165 is flexible and pliable and will not harden, swell or become brittle.*

Equipment: *Any type of pump-centrifugal, rotary, turbine, and reciprocating. It can also be used in valves, agitators, mixers, dryers and refiners.*

Applications: *Solvents, chemicals, gases, corrosives, water, steam, slurries, paper stock, black liquor, oils and ammonia*

Industries: *Chemical & Pharmaceutical, Agriculture, Pulp & Paper, Marine, Oil & Gas, Steel, Power generation, Municipal/Wastewater and General industry*