

ChemStar Mechanical Packing, Inc.

Address: 3010 Reynolds Rd

Lakeland, FL 33803 USA

Office: (863) 425-5581 / (800) 397-5581


Fax: (863) 425-5762

Email: sales@chemstarpacking.com

Website: www.chemstarpacking.com



STYLE 1100TCP

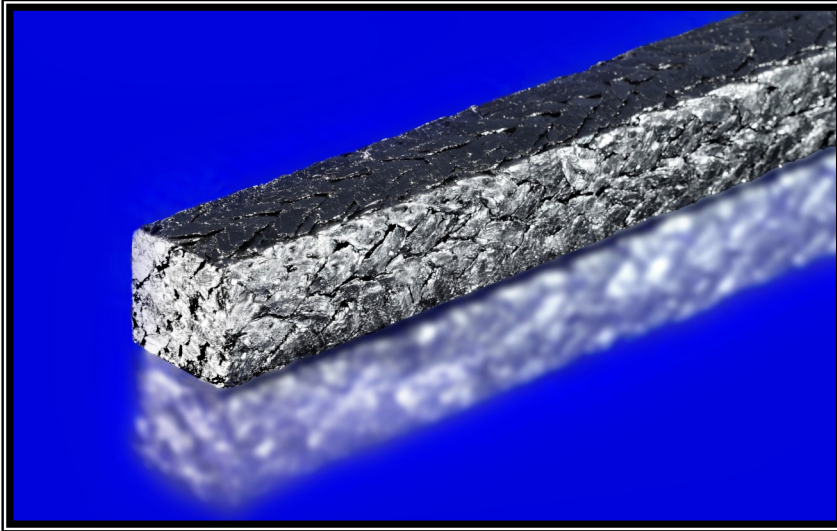

- **Temperature: To 1200°F / 650°C Steam; To 800°F / 455°C Atmosphere**
- **pH Range: 0-14 except strong oxidizers**
- **Speed: 4000 FPM**
- **Pressure: 3000 PSI / 200 Bar**
- **Construction: Interlock Braid**

Description: *Braided from pure expanded flexible graphite. It is self-lubricating, chemically inert and thermally conductive.*

Equipment: *Expansion joints, rotating & reciprocating equipment, soot blowers and valves*

Applications: *Air, ammonia, chemicals, corrosives, gases, oils, paper stock, solvents, liquor, water, steam, boiler feed water and condensate*

Industries: *Chemical & Pharmaceutical, General industry, Oil & Gas, Pulp & Paper, Power generation, Mining & Minerals, Municipal/Wastewater and Steel & Metals*